INOUE Q62170
PROGRAM GUIDE DISPLAYING APPARATUS
AND METHOD
December 8, 2000
Darryl Mexic 202-293-76. 200 AUD IO OUT PUT VIDEO OUTPUT EPG OUTPUT EPG DISPLAY DATA PROCESSING (AMP etc.,) **PROCESSOR** DISPLAY AUD 10 MODEM δ ∞ VIDEO IN PROGRAM AUDIO IN PROGRAM CPU MPEG 2-video MPEG 2 AAC AUD I O DECODER VIDEO DECODER FOR SI/PSI· EPG TEXT INFORMATION SATELLITE DIGITAL BROADCAST RECEIVING APPARATUS VIDEO DATA RAM 107 AUDIO DATA e t c . ,) MPEG2 TS DEMULTI -PLEXER 16 9 ROM (FONT etc.,) ~20 SCRAMBLER 7 C CARD FLASH MEMORY (GRAPHICS FOR EPG etc.,) IF MPEG2 TS DEMODU -LATING S SIGNAL TUNER BS-RF SIGNAL CONTRO-LLER REMOTE က /

PUBRIC NETWORK:19

<u>Б</u>

--

INOUE Q62170
PROGRAM GUIDE DISPLAYING APPARATUS
AND METHOD
December 8, 2000
Darryl Mexic 202-293-700
2 of 9

FIG. 2

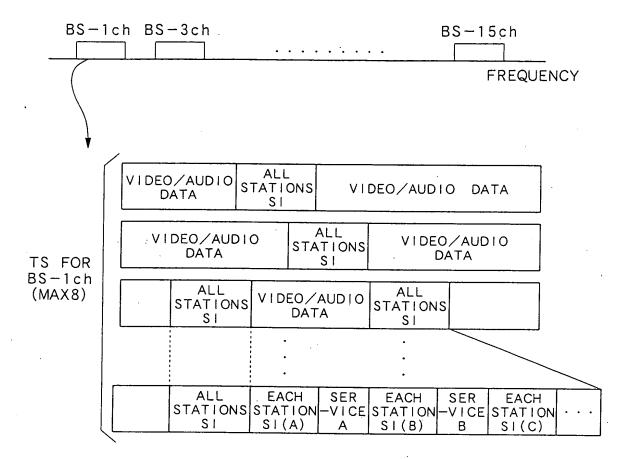


FIG. 3

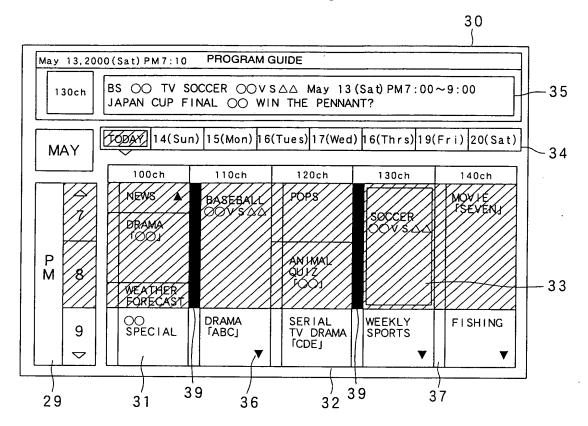


FIG. 4



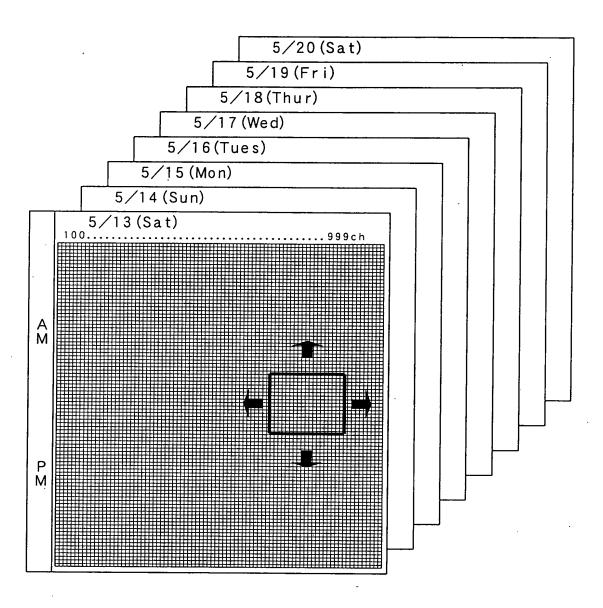


FIG. 5

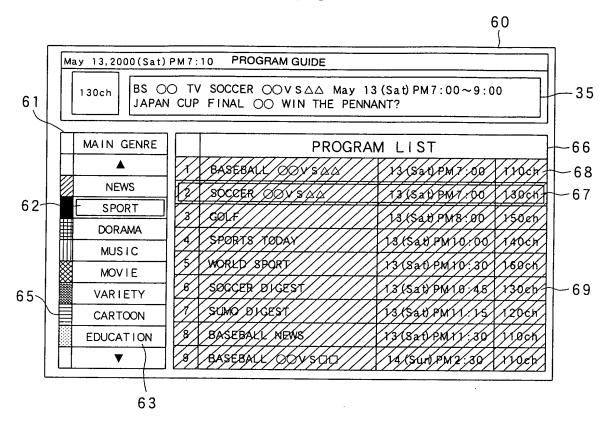


IJ

4 9




Q62170

FIG. 6

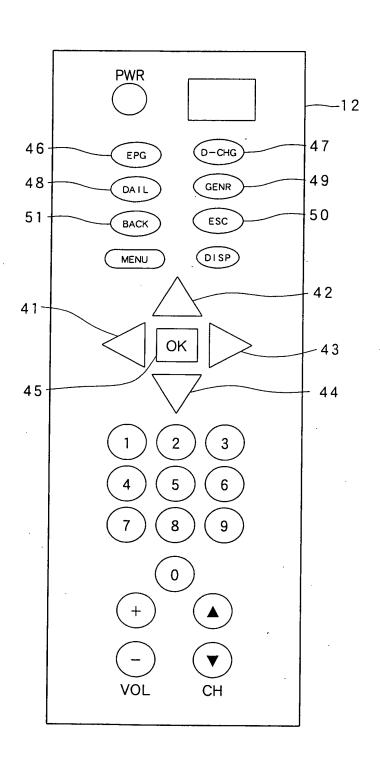


The state of the s

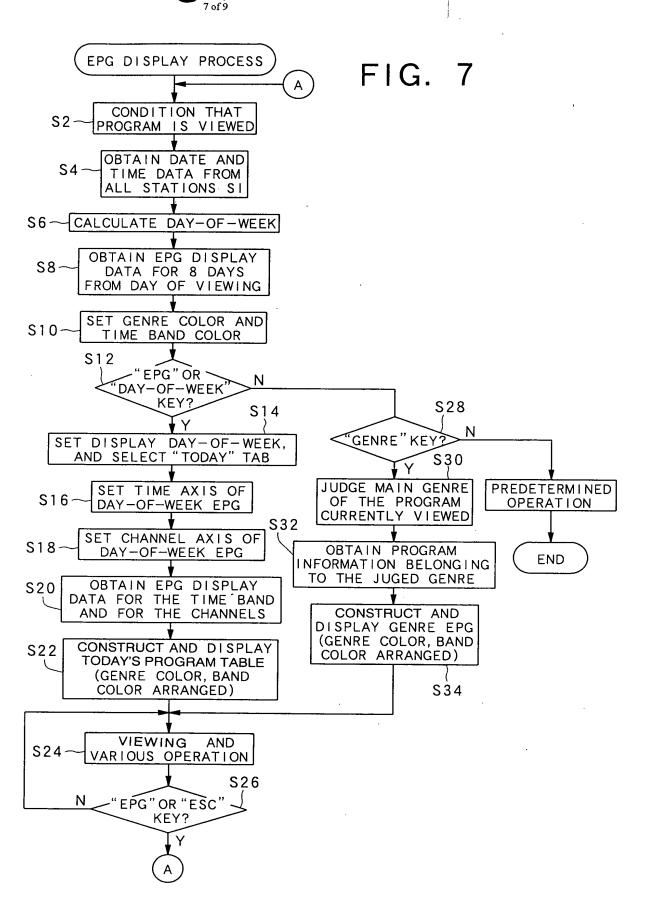

I


ii ļeš

FIG. 8

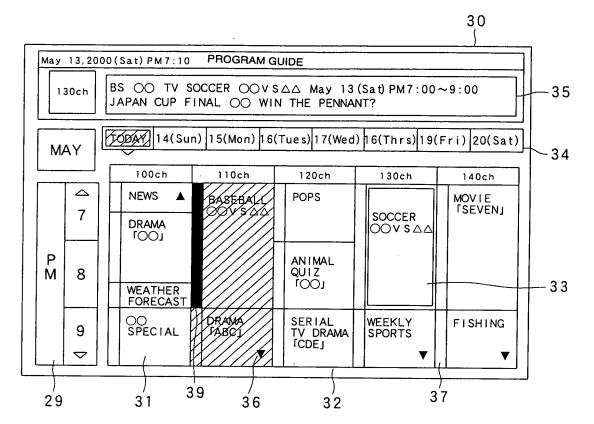

norright, tenent

FIG. 9

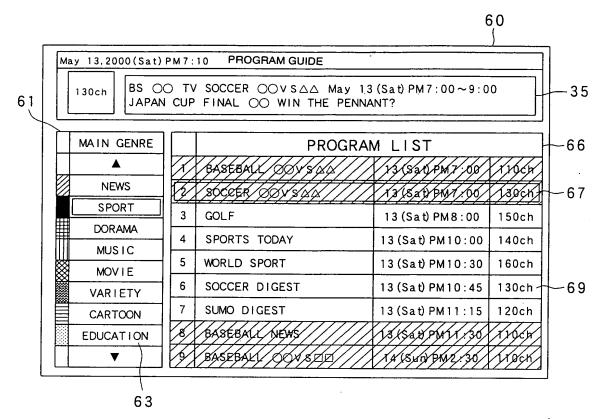

-4